



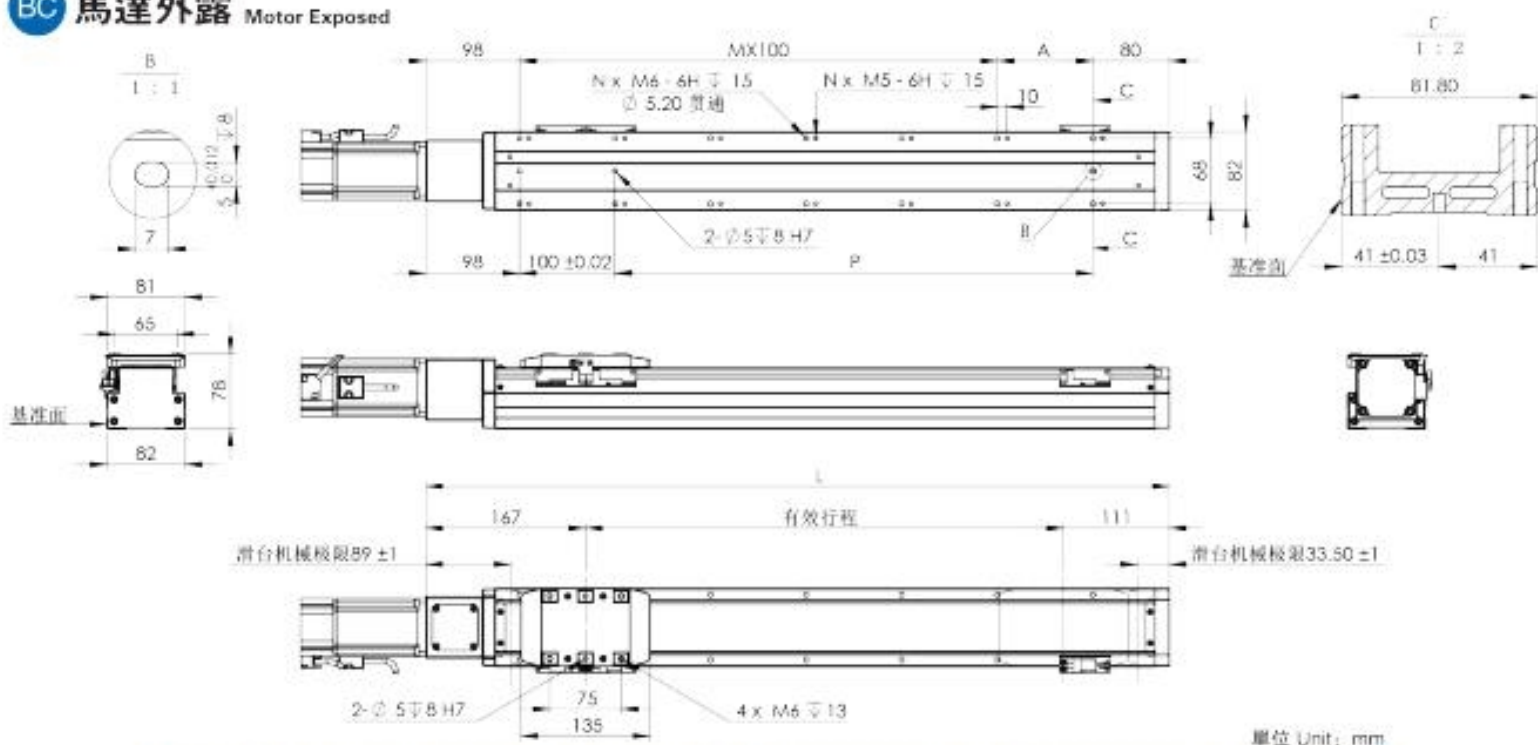

單位 Unit: mm

| 有效行程<br>Stroke | 50  | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700  | 750  | 800  | 850  | 900  | 950  | 1000 | 1050 | 1100 |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|
| L              | 328 | 378 | 428 | 478 | 528 | 578 | 628 | 678 | 728 | 778 | 828 | 878 | 928 | 978  | 1028 | 1078 | 1128 | 1178 | 1228 | 1278 | 1328 | 1378 |
| A              | 50  | 100 | 50  | 100 | 50  | 100 | 50  | 100 | 50  | 100 | 50  | 100 | 50  | 100  | 50   | 100  | 50   | 100  | 50   | 100  | 50   | 100  |
| M              | 1   | 1   | 2   | 2   | 3   | 3   | 4   | 4   | 5   | 5   | 6   | 6   | 7   | 7    | 8    | 8    | 9    | 9    | 10   | 10   | 11   | 11   |
| N              | 6   | 6   | 8   | 8   | 10  | 10  | 12  | 12  | 14  | 14  | 16  | 16  | 18  | 18   | 20   | 20   | 22   | 22   | 24   | 24   | 26   | 26   |
| P              | 50  | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700  | 750  | 800  | 850  | 900  | 950  | 1000 | 1050 | 1100 |
| KG             | 5.2 | 5.5 | 5.9 | 6.3 | 6.7 | 7.1 | 7.4 | 7.8 | 8.2 | 8.5 | 8.9 | 9.3 | 9.6 | 10.0 | 10.4 | 10.8 | 11.1 | 11.5 | 11.9 | 12.2 | 12.6 | 13.0 |

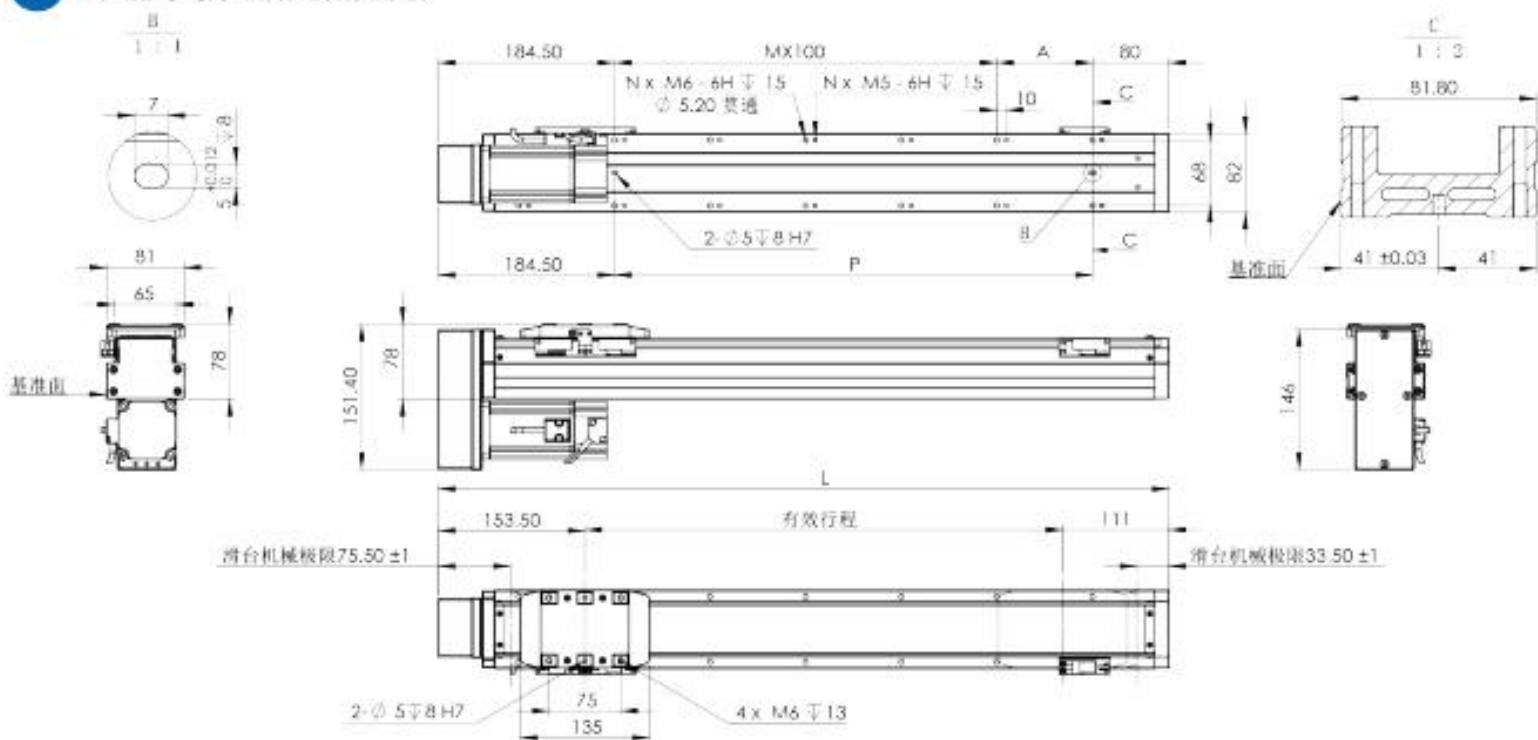

\*馬達總長常限制在121以內

單位 Unit: mm

| 有效行程<br>Stroke | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| L              | 314.5 | 364.5 | 414.5 | 464.5 | 514.5 | 564.5 | 614.5 | 664.5 | 714.5 | 764.5 | 814.5 | 864.5 | 914.5 | 964.5 | 1014.5 | 1064.5 | 1114.5 | 1164.5 | 1214.5 | 1264.5 | 1314.5 | 1364.5 |
| A              | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50     | 100    | 50     | 100    | 50     | 100    | 50     | 100    |
| M              | 0     | 0     | 1     | 1     | 2     | 2     | 3     | 3     | 4     | 4     | 5     | 5     | 6     | 6     | 7      | 7      | 8      | 8      | 9      | 9      | 10     | 10     |
| N              | 4     | 4     | 6     | 6     | 8     | 8     | 10    | 10    | 12    | 12    | 14    | 14    | 16    | 16    | 18     | 18     | 20     | 20     | 22     | 22     | 24     | 24     |
| P              | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
| KG             | 5.4   | 5.9   | 6.4   | 6.9   | 7.4   | 7.9   | 8.4   | 8.9   | 9.4   | 9.9   | 10.4  | 10.9  | 11.4  | 11.9  | 12.4   | 12.9   | 13.4   | 13.9   | 14.4   | 14.9   | 15.4   | 15.9   |

\*馬達下折時，若選用然申馬達，或是超出馬達總長度限制時無法套用標準PIN孔。如有需求請洽我司業務。  
When motor with brake assembled on lower side, or the total length over than spec. limit, it may not use standard pinhole. Please contact our sales department if you need more information & recommend.

## BL



| 有效行程<br>Stroke | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| L              | 314.5 | 364.5 | 414.5 | 464.5 | 514.5 | 564.5 | 614.5 | 664.5 | 714.5 | 764.5 | 814.5 | 864.5 | 914.5 | 964.5 | 1014.5 | 1064.5 | 1114.5 | 1164.5 | 1214.5 | 1264.5 | 1314.5 | 1364.5 |
| A              | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50     | 100    | 50     | 100    | 50     | 100    | 50     | 100    |
| M              | 1     | 1     | 2     | 2     | 3     | 3     | 4     | 4     | 5     | 5     | 6     | 6     | 7     | 7     | 8      | 8      | 9      | 9      | 10     | 10     | 11     | 11     |
| N              | 6     | 6     | 8     | 8     | 10    | 10    | 12    | 12    | 14    | 14    | 16    | 16    | 18    | 18    | 20     | 20     | 22     | 22     | 24     | 24     | 26     | 26     |
| P              | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
| KG             | 5.4   | 5.9   | 6.4   | 6.9   | 7.4   | 7.9   | 8.4   | 8.9   | 9.4   | 9.9   | 10.4  | 10.9  | 11.4  | 11.9  | 12.4   | 12.9   | 13.4   | 13.9   | 14.4   | 14.9   | 15.4   | 15.9   |

## BR



| 有效行程<br>Stroke | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| L              | 314.5 | 364.5 | 414.5 | 464.5 | 514.5 | 564.5 | 614.5 | 664.5 | 714.5 | 764.5 | 814.5 | 864.5 | 914.5 | 964.5 | 1014.5 | 1064.5 | 1114.5 | 1164.5 | 1214.5 | 1264.5 | 1314.5 | 1364.5 |
| A              | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50    | 100   | 50     | 100    | 50     | 100    | 50     | 100    | 50     | 100    |
| M              | 1     | 1     | 2     | 2     | 3     | 3     | 4     | 4     | 5     | 5     | 6     | 6     | 7     | 7     | 8      | 8      | 9      | 9      | 10     | 10     | 11     | 11     |
| N              | 6     | 6     | 8     | 8     | 10    | 10    | 12    | 12    | 14    | 14    | 16    | 16    | 18    | 18    | 20     | 20     | 22     | 22     | 24     | 24     | 26     | 26     |
| P              | 50    | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700   | 750    | 800    | 850    | 900    | 950    | 1000   | 1050   | 1100   |
| KG             | 5.4   | 5.9   | 6.4   | 6.9   | 7.4   | 7.9   | 8.4   | 8.9   | 9.4   | 9.9   | 10.4  | 10.9  | 11.4  | 11.9  | 12.4   | 12.9   | 13.4   | 13.9   | 14.4   | 14.9   | 15.4   | 15.9   |