
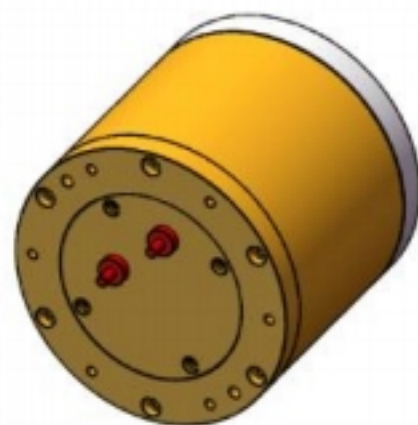
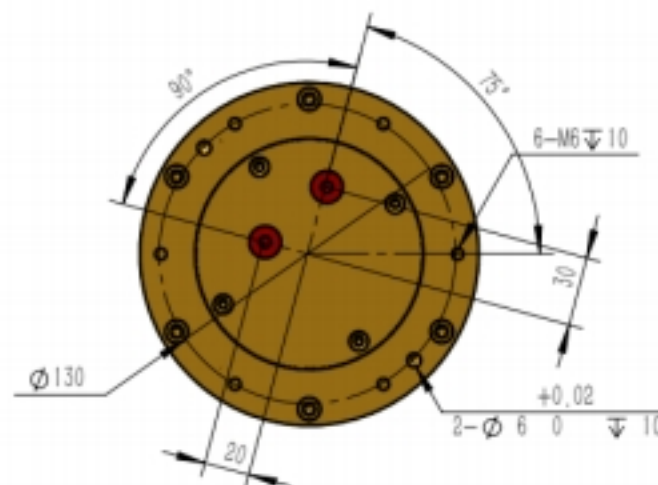
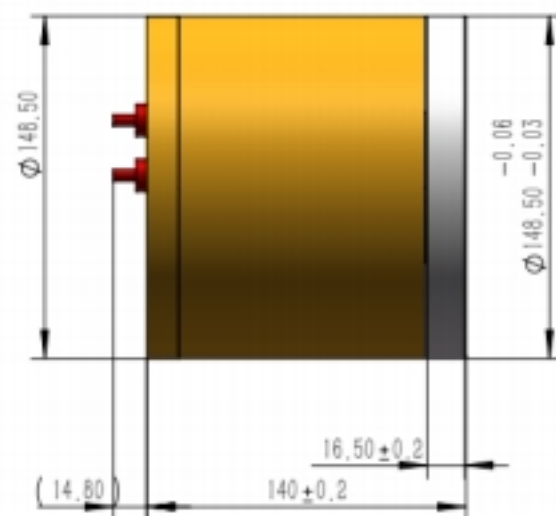


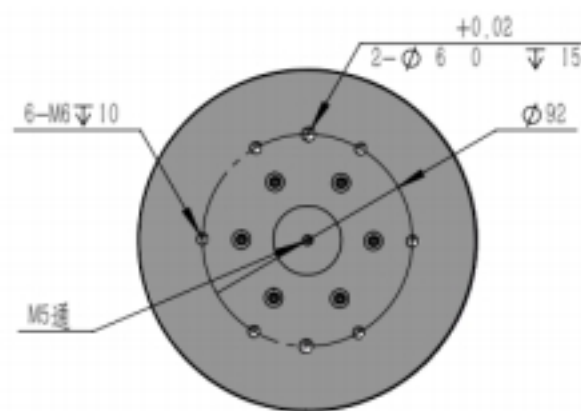

主要参数	单位	ZRDDR-150140-30-500-DMC
高度	mm	140
直径	mm	150
最大转矩	N.m	30
连续转矩	N.m	10
最大电流	A rms	10
连续电流	A rms	3.5
最高转速	rpm	500
电阻 (ptp)	Ω	10
电感 (ptp)	mH (25°C)	30
转矩常数	Nm/A rms	3
极数	-	28
编码器分辨率	pluse/rev	8388608
绝对定位精度	Arc sec	±15
重复定位精度	Arc sec	±2
转动惯量	Kg m2	0.01925
基本额定静载荷	N	4000
轴向偏摆	um	5
径向偏摆	um	5
电机重量	Kg	11
温度	°C	0-40
湿度	%	0-85
防护等级	IP	20