


注：电机内置为100W电机

切+劇主


单位 Unit: mm

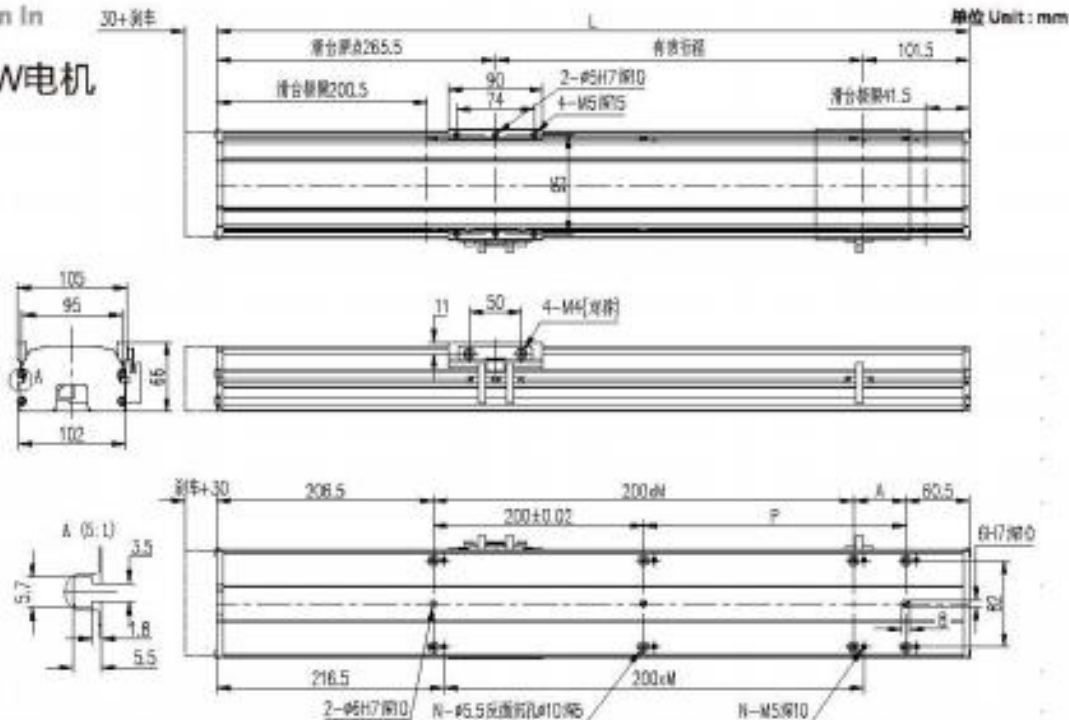

有效行程 stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L	467	517	567	617	667	717	767	817	867	917	967	1017	1067	1117	1167	1217	1267	1317	1367	1417
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14
P	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950
KG	5.5	5.8	6.2	6.6	7	7.4	7.8	8.2	8.5	8.9	9.3	9.7	10.1	10.5	10.9	11.2	11.6	12	12.4	12.8

马达外露 Motor Exposed

單位 Unit: mm

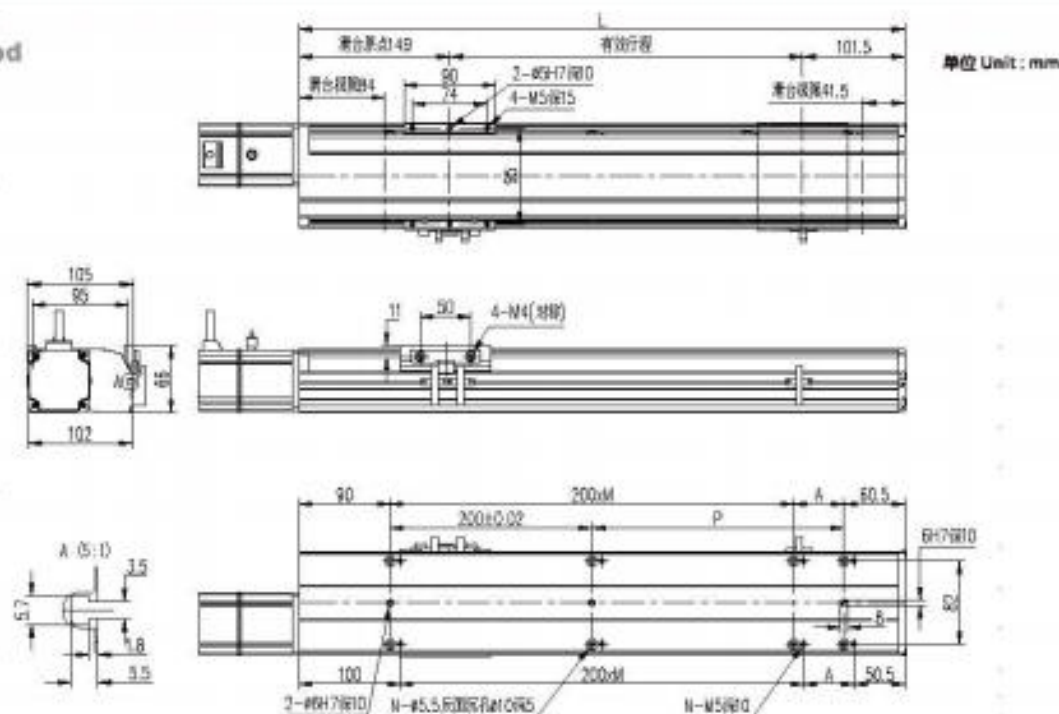

有效行程 stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L	350.5	400.5	450.5	500.5	550.5	600.5	650.5	700.5	750.5	800.5	850.5	900.5	950.5	1000.5	1050.5	1100.5	1150.5	1200.5	1250.5	1300.5
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14
P	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950
KG	5.5	5.8	6.2	6.6	7	7.4	7.8	8.2	8.5	8.9	9.3	9.7	10.1	10.5	10.9	11.2	11.6	12	12.4	12.8

BL

马达左折 Motor Left Side

Technical drawing of the 200x100mm profile, showing front, side, and cross-sectional views with dimensions and part numbers.

Front View Dimensions:

- Overall width: 200mm
- Overall height: 100mm
- Top flange width: 61.30mm
- Bottom flange width: 41.5mm
- Top flange thickness: 5.5mm
- Bottom flange thickness: 5.5mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm

Side View Dimensions:

- Overall width: 200mm
- Overall height: 100mm
- Top flange width: 61.30mm
- Bottom flange width: 41.5mm
- Top flange thickness: 5.5mm
- Bottom flange thickness: 5.5mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm

Cross-sectional View Dimensions:


- Overall width: 200mm
- Overall height: 100mm
- Top flange width: 61.30mm
- Bottom flange width: 41.5mm
- Top flange thickness: 5.5mm
- Bottom flange thickness: 5.5mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm
- Top flange hole diameter: 2- $\phi 5H7/g6$
- Bottom flange hole diameter: 4- $\phi 5H7/g6$
- Top flange hole spacing: 74mm
- Bottom flange hole spacing: 74mm
- Top flange hole offset: 11mm
- Bottom flange hole offset: 11mm

有效行程 stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5	781.5	831.5	881.5	931.5	981.5	1031.5	1081.5	1131.5	1181.5	1231.5	1281.5
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14
P	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950
KG	5.5	5.8	6.2	6.6	7	7.4	7.8	8.2	8.5	8.9	9.3	9.7	10.1	10.5	10.9	11.2	11.6	12	12.4	12.8

BR

马达右折 Motor Right Side

有效行程 stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5	781.5	831.5	881.5	931.5	981.5	1031.5	1081.5	1131.5	1181.5	1231.5	1281.5
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14
P	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950
KG	5.5	5.8	6.2	6.6	7	7.4	7.8	8.2	8.5	8.9	9.3	9.7	10.1	10.5	10.9	11.2	11.6	12	12.4	12.8

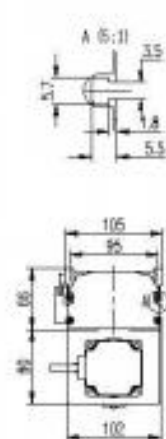

單位 Unit: mm

有效行程 stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L	331.5	381.5	431.5	481.5	531.5	581.5	631.5	681.5	731.5	781.5	831.5	881.5	931.5	981.5	1031.5	1081.5	1131.5	1181.5	1231.5	1281.5
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14
P	0	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950
KG	5.5	5.8	6.2	6.6	7	7.4	7.8	8.2	8.5	8.9	9.3	9.7	10.1	10.5	10.9	11.2	11.6	12	12.4	12.8