




节省能源

2级扩压管设计

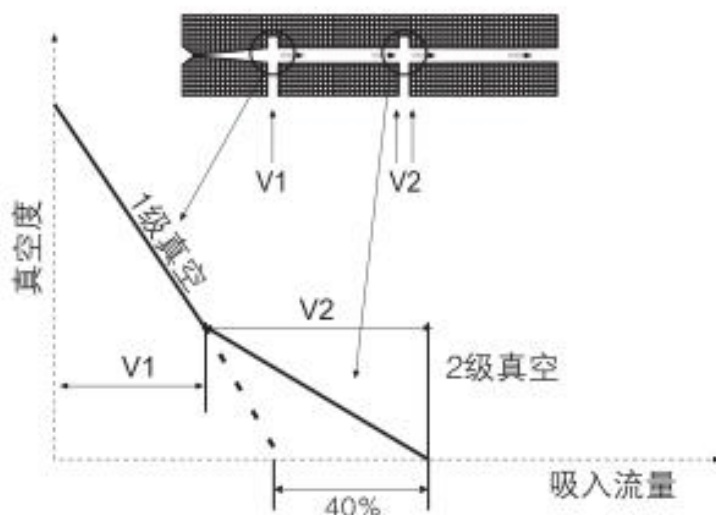

产品参数

型号	供气压力bar	最大真空度 (-kPa)	最大真空流量 (l/min)	空气消耗量 (l/min)	噪音 (dBA)	最小软管内径Φ(2m内)		
						供气	真空	排气
HPBX5	4.5~6	90	30~34	18~20	50~65	>2	>5	>8
HPBX10			52~65	31~37	55~68	>2	>8	>10
HPBX20			100~126	79~85	60~69	>4	>10	>12
HPBX30	5~6		180~185	128~135	60~69	>6	>12	>15

※ 备注：型号 重量= HPBX5-A (B,AB,NAB,C,NC) :32.5g (38g,58g,58g,38g,38g)
 HPBX10-A (B,AB,NAB,C,NC) : 32g (37.5g,57.5g,57.5g,37.5g,37.5g)
 HPBX20-B (AB,NB,NAB,C,NC) : 50g (70g,70g,70g,50g,50g)
 HPBX30-B (AB,NB,NAB,C,NC) : 62.5g (82.5g,82.5g,82.5g,62.5g,62.5g,)



各真空度真空流量 Vacuum flow (NI/min) at different vacuum level (-kPa)

型号	-kPa	供气压力	0	10	20	30	40	50	60	70	80	90	最大真空度
PBX5	4.5bar	4.5bar	30	11	6.5	6	5	4	3	2.5	1.5	0.3	-90kPa
PBX10			52	21	17	14	12	10	7	5	2	0.6	
PBX20			100	43	32	29	23	20	15	10	4	1.2	
PBX30	5bar	5bar	180	90	50	42	38	27	24	18	10	2.5	



各真空度抽气时间 Time (s/L) to evacuate a volume to different Vacuum level (-kpa)

型号	-kPa	供气压力	10	20	30	40	50	60	70	80	90
HPBX5	4.5bar	4.5bar	0.1	0.5	1.2	2.1	3	4	6	8	14
HPBX10			0.9	0.2	0.6	1	1.2	1.8	2.5	4.1	9.5
HPBX20			0.07	0.12	0.25	0.4	0.6	1.1	1.3	2	4
HPBX30	5bar	5bar	0.03	0.1	0.15	0.3	0.4	0.5	1	1.2	2



•HPBX5

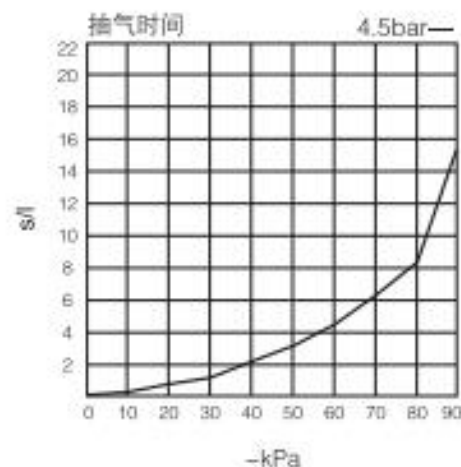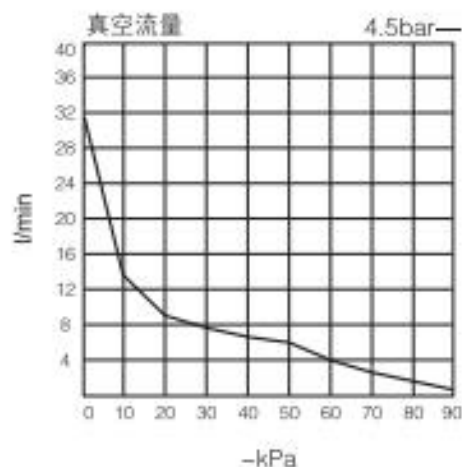

•HPBX10

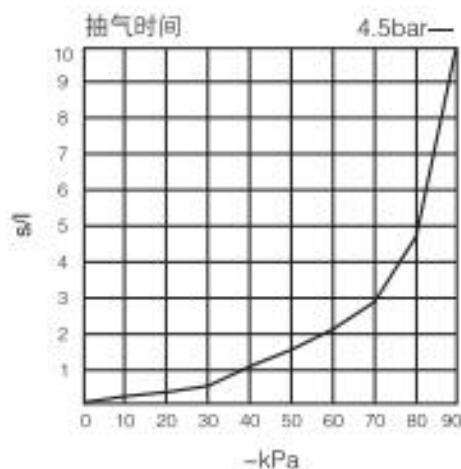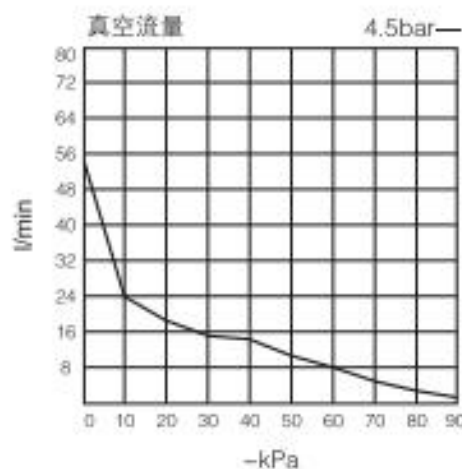

•HPBX20

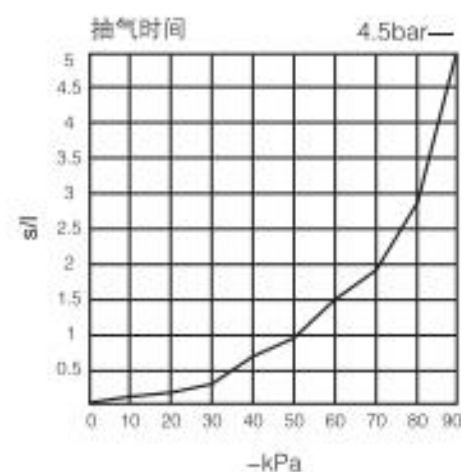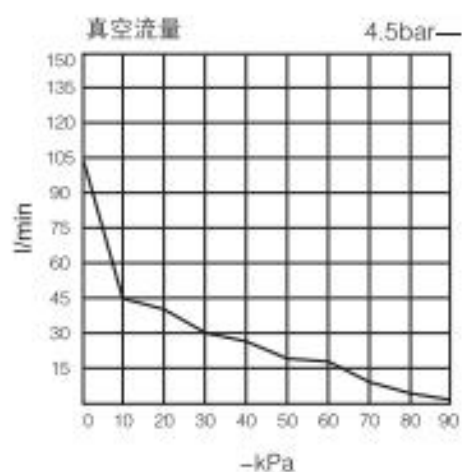

•HPBX30

